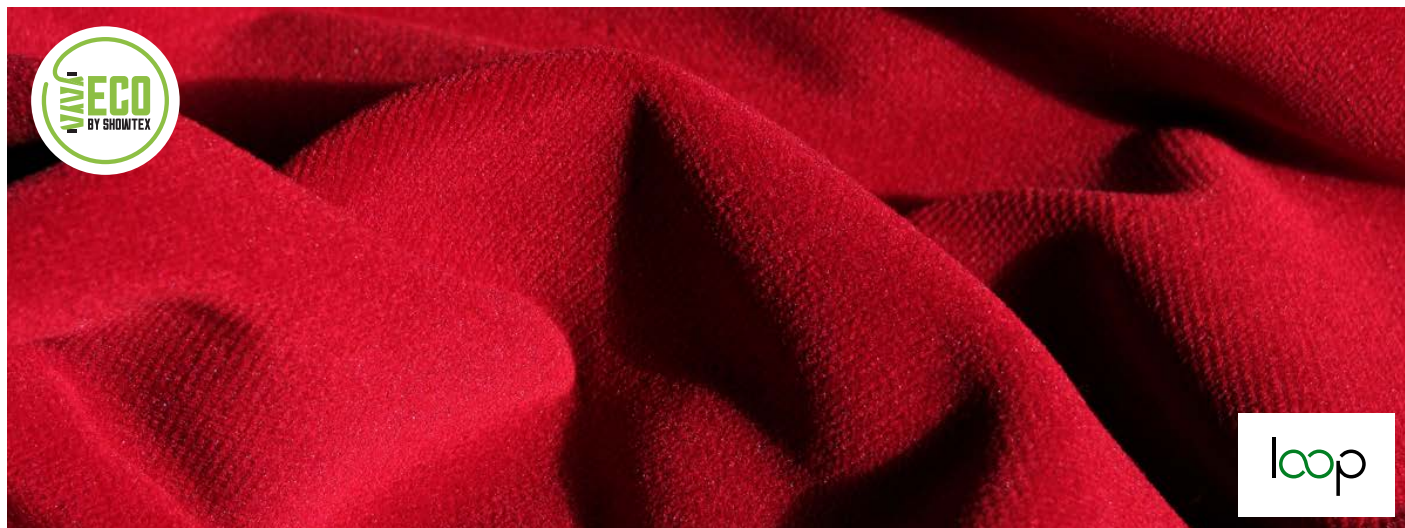


VELOURS HELENA CS



Permanently flame-retardant stage velvet with upright pile and light satin sheen. Light weight synthetic velvet. Oekotex 100 certified (Class 4)

SPECIFICATIONS

Item	Width	Length	Weight	Composition
1205	145 cm	± 35 m	380 g/m ²	40% TCS / 60% PES FR 59% rPES FR / 41% PES FR (Loop)

All newly produced colour batches use recycled (Loop) yarns. Contact us for availability.

FR standard		
BS 5867 PART 2B / pass DIN 4102 / B1	EN 13501-1 / B-s1, d0 EN 13773 / class 1	NF P 92-507 / M1 NFPA 701 / pass

Loop items are only EN 13773 / class 1 certified.

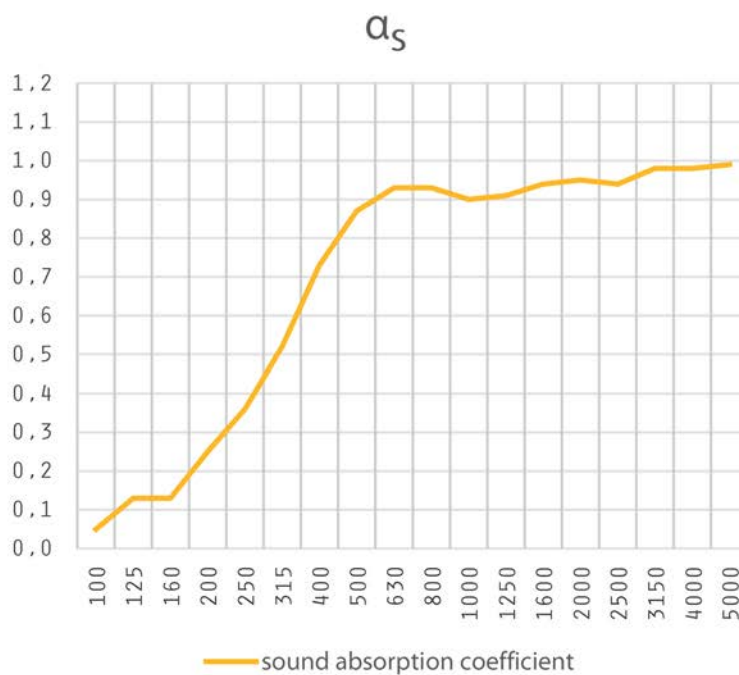
Care instructions 	Abrasion resistance ISO 12947 60 000 cycles	Colour fastness to light ISO 105-B02-2014 Note 4-5
Pilling resistance ISO 12945-2 note 5	Tear strength ISO 13937-3: 2000 Warp: 19 N - Weft: 18 N	Tensile strength ISO 13934-1: 1999 Warp: 1200 N - Weft 1150 N

VELOURS HELENA CS

SOUND ABSORPTION

f(Hz)	α_s
100	0,05
125	0,13
160	0,13
200	0,25
250	0,36
315	0,52
400	0,73
500	0,87
630	0,93
800	0,93
1000	0,90
1250	0,91
1600	0,94
2000	0,95
2500	0,94
3150	0,98
4000	0,98
5000	0,99








ISO 11654
 $\alpha_w = 0,70(H)$



100% pleated • 10 cm from the wall

VELOURS HELENA CS

AVAILABLE COLOURS

						
0002	0007	0201	0301	1000	1002	1005
						
1015	1033	2010	3001	3002	3016	3027
						
4004	4006	4008	4010	5000	5005	5007
						
5008	5010	5012	6005	6009	6017	6018
						
6025	6026	7004	7010	7021	7044	8004
						
8008	8014	8016	8017	8025		