

VELOURS PARIS CS



Permanently flame-retardant stage velvet with upright pile and light satin sheen. Heavy-weight synthetic velvet. Oekotex 100 certified (Class 4)

SPECIFICATIONS

Item	Width	Length	Weight	Composition
1208	140 cm	± 30 m	500 g/m ²	62% TCS / 38% PES FR 42% rPES FR / 58% PES FR (Loop)

All newly produced colour batches use recycled (Loop) yarns. Contact us for availability.


FR standard			
BS 5867 PART 2B / pass DIN 4102 / B1	EN 13773 / class 1 GB 8624 / B1	NF P 92-507 / M1 NFPA 701 / pass	

Loop items are only EN 13773 / class 1 certified.

Care instructions 	Abrasion resistance ISO 12947 100 000 cycles	Colour fastness to light ISO 105-B02-2014 note 4-5
Colour fastness to rubbing (dry) NF EN ISO 105-X12 : 2016 Warp: 4-5 · Weft: 4-5	Pilling resistance ISO 12945-2 Note 5	Tensile strength ISO 13934-1: 1999 Warp: 1300 N · Weft 1160 N

VELOURS PARIS CS

SOUND ABSORPTION

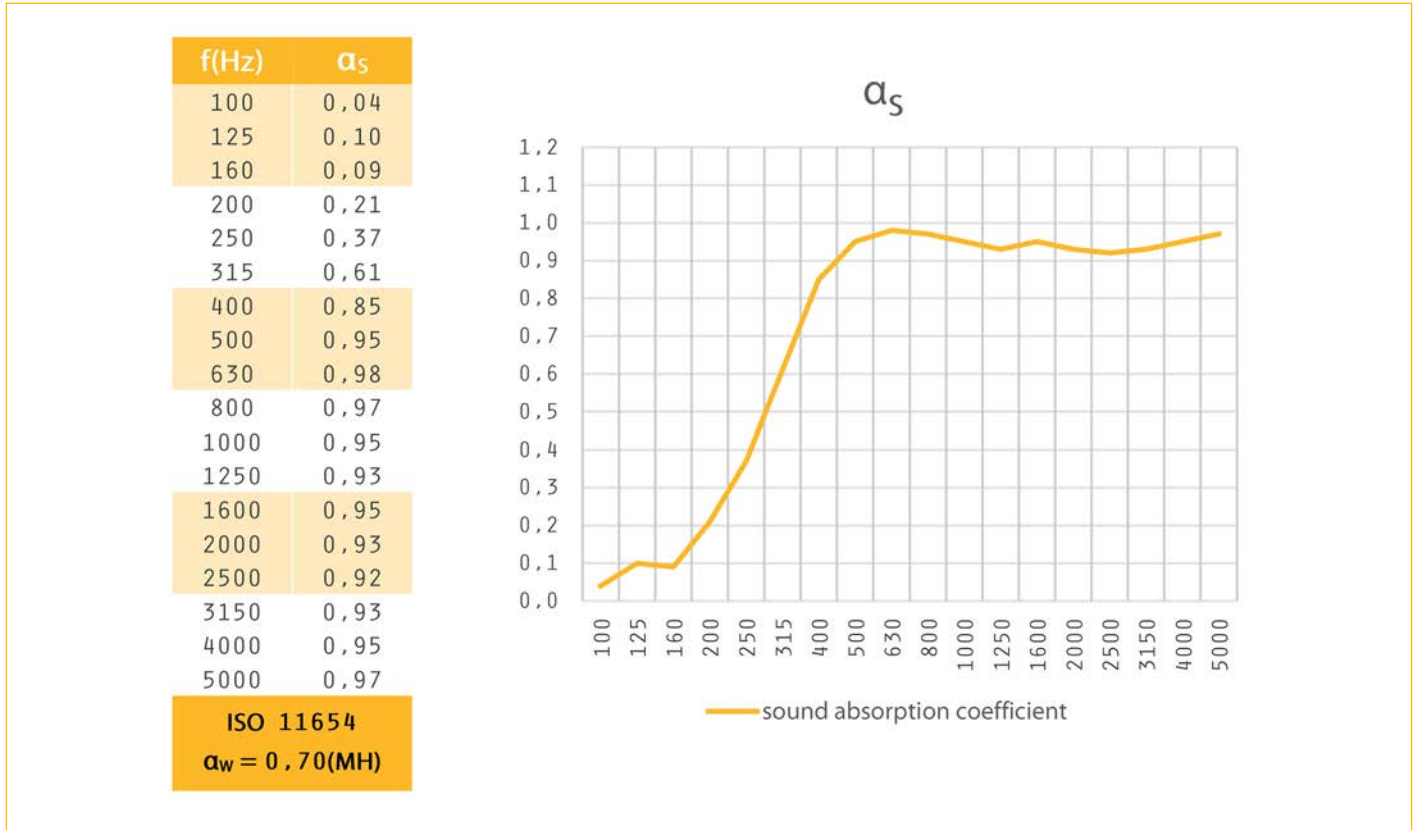

100% pleat • 10 cm from the wall

VELOURS PARIS CS

AVAILABLE COLOURS

